

1 2 3 4 5 6


A

B


C

D

E

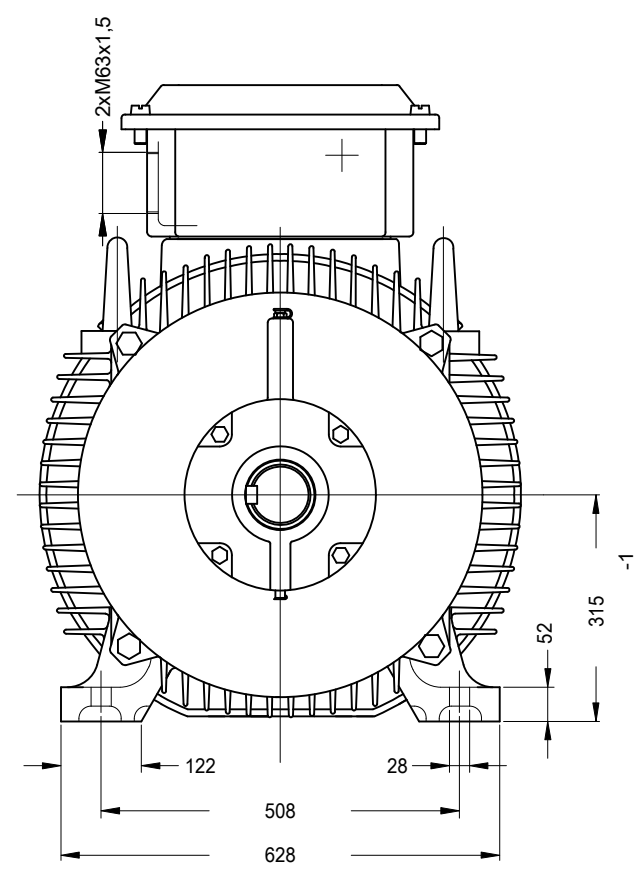


Grounding for leads 35-70 mm<sup>2</sup> / 1-2/0 AWG




View X

X  
↓

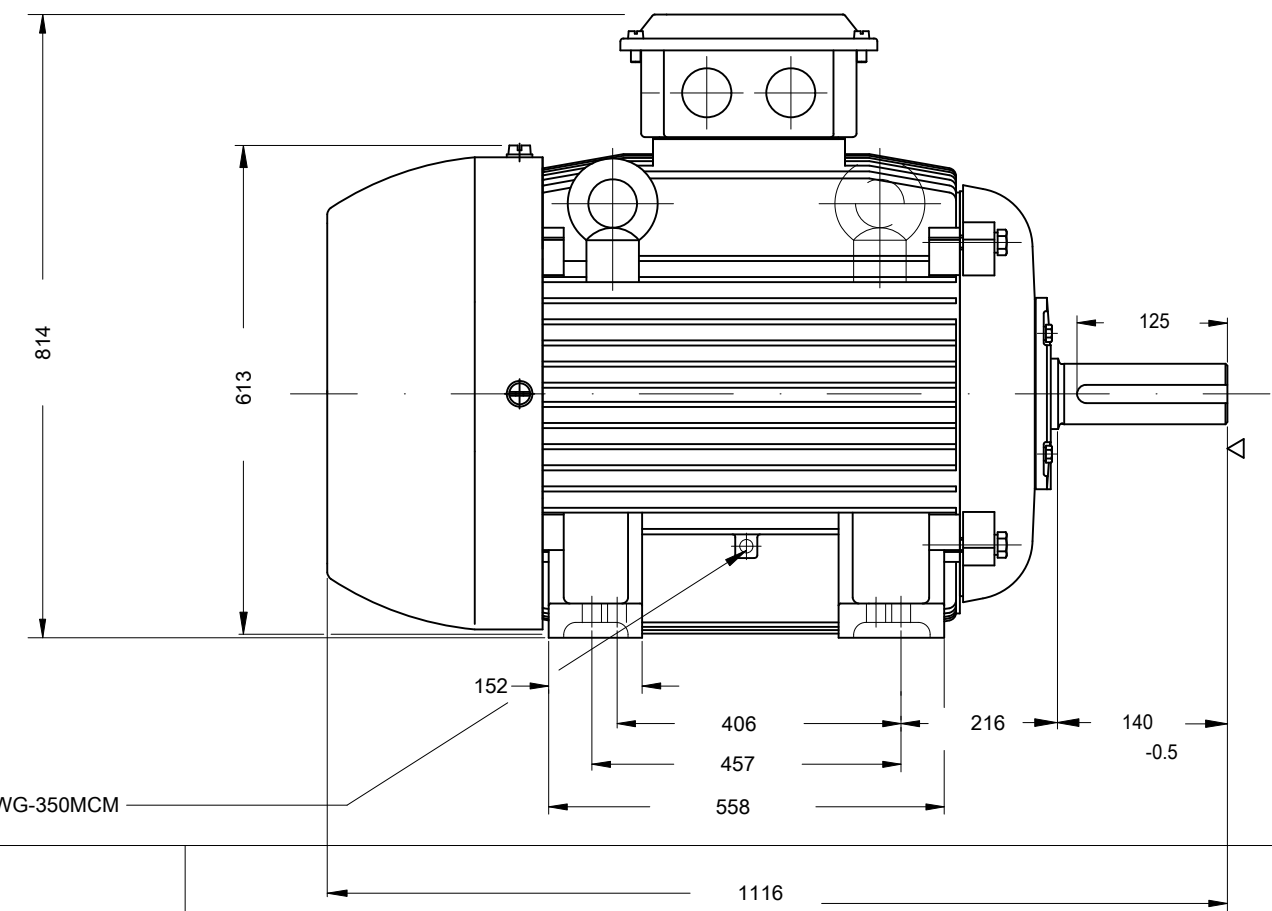

Grounding for leads 25-185 mm<sup>2</sup> / 3AWG-350MCM

Color RAL 7000  
Painting plan 201A  
Mounting B3T

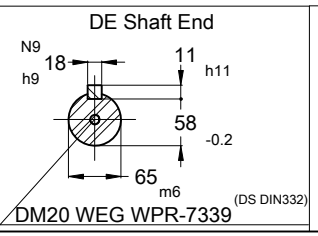

110 kW 02 Poles 50 Hz A

ECM	LOC	SUMMARY OF MODIFICATIONS	PIRWUSER	EXECUTED	CHECKED	RELEASED	DATE	VER
EXECUTED	PIRWUSER	THREE PH. MOTOR W20						00
CHECKED		FRAME 315S/M IP55 TEFC						
RELEASED								
REL. DATE	WEG	NANTONG	[Global Sales]					

PREVIEW  
WDD 00  
SHEET 1 / 1

