



## Performance Parameters

Model	Power		Inlet/Outlet In	Q(m³/h)	0	3	6	9	12	15	17	18	21	24	26	27	28.5	30	33	
	kW	HP			Q(l/min)	0	50	100	150	200	250	283	300	350	400	433	450	475	500	550
THF6C	0.95	1.3	1.5"x1.5"	H(m)	16	16.1	15.7	15	14.3	13.8	12.2									
THF6B	1.1	1.5	2"x2"		26	23.2	20.7	18.3	16.2	14.5	14.2	12.4	10.7	9.6	8.8					
THF6B-1	1.5	2	2"x2"		22	21.5	21	20.5	20	19	18	17.5	16.5	15	15.3	13.2	12.5	11.2	9	
THF6B-3	2.2	3	2"x2"		25	24.6	24	23.2	22.1	21	20.3	19.2	17.3	15.8	14	13.5	11.4	11		
TGA1A	0.75	1	1.5"x1.5"		20	19.7	18.7	17.2	15.5	13.3	12.5	10								
TGA1C	0.75	1	2"x2"		14.7	14.4	14.1	13.7	13.2	12.8	12.4	11.9	11	9.9	9.1	8.5	7.4			

Model	Power		Inlet/Outlet In	Q(m³/h)	0	10	20	30	40	50	55	60	65	70	80	90	100	106
	kW	HP			Q(l/min)	0	167	333	500	667	833	917	1000	1083	1166	1333	1500	1666
THF5A	1.5	2	3"x3"	H(m)	14.5	14.4	13.7	12.4	10.4	7.8	7.1	6						
THF6A	2.2	3	4"x4"		17.5	14.62	14.3	14.2	12.5	9.9	8.9	7.2	6.9					
THF8A-1	3	4	3"x3"		17.5	17.3	16.5	15.3	13.2	10	8.5							
THF5A(6C)	1.1	1.5	3"x3"		12.50	12.00	11.90	11	9	6.7	5.5							
THF6A-1	2.2	3	3"x3"		14.6	14.5	14	12.8	11	8	7.5							
THF6A-2	1.9	2.5	4"x4"		14.3	14.1	13.7	13	11.7	9.1	7	5						
THF6A-3	1.1	1.5	4"x4"		12.5	12.3	11.8	10.5	8.4	5.7	5							
THF8A	3	4	4"x4"		20	19.3	18	16.1	13.5	10.3	9.4	8.5	9.5					
THF10A	4	5.5	4"x4"		16.5	16.4	16.2	16	15.4	14.2	13.3	12.1	8.5	7.4	5.4	3.2		

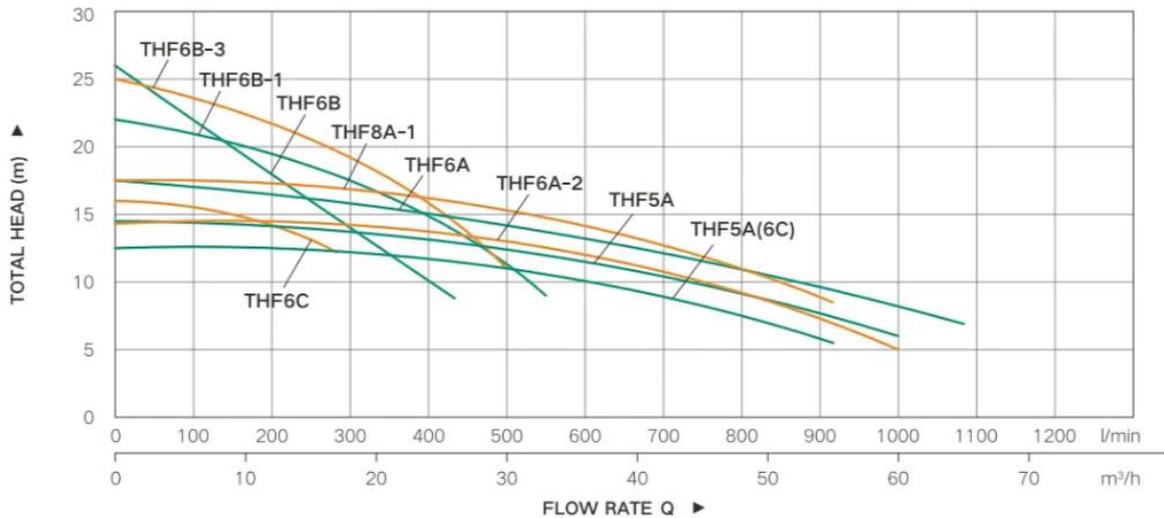

## Package Dimensions



Model	L	W	H
	cm	cm	cm
TGA1A	33,6	22,5	28
TGA1C	37,5	22,3	27
THF6C	42	25,5	31
THF6B	42	25,5	31
THF6B-1	51,5	25	29,5
THF6B-3	46	23	28
THF5A	51,5	25	29,5
THF6A	46	23	28