




Performance Data

Model	Power		Rate Current (A)	Flow													
	kW	HP		m³/h	0	3	6	9	12	15	18	21	24	27			
380V				l/min	0	50	100	150	200	250	300	350	400	450			
6SS17/9	5.5	7.5	13	H(m)	85	82	81	79	74	67	57	45	30	13			
6SS17/12	7.5	10	18		111	109	108	105	98	89	76	60	40	17			
6SS17/15	9.2	12.5	23		141	136	135	131	123	111	95	75	50	21			
6SS17/18	11	15	26		170	164	162	158	147	134	114	90	60	26			
6SS17/21	13	17.3	33		198	191	189	184	171	156	133	105	70	30			
6SS17/24	15	20	35		226	218	216	210	196	178	152	120	80	34			
6SS17/30	18.5	25	45		283	273	270	263	245	223	190	150	100	43			

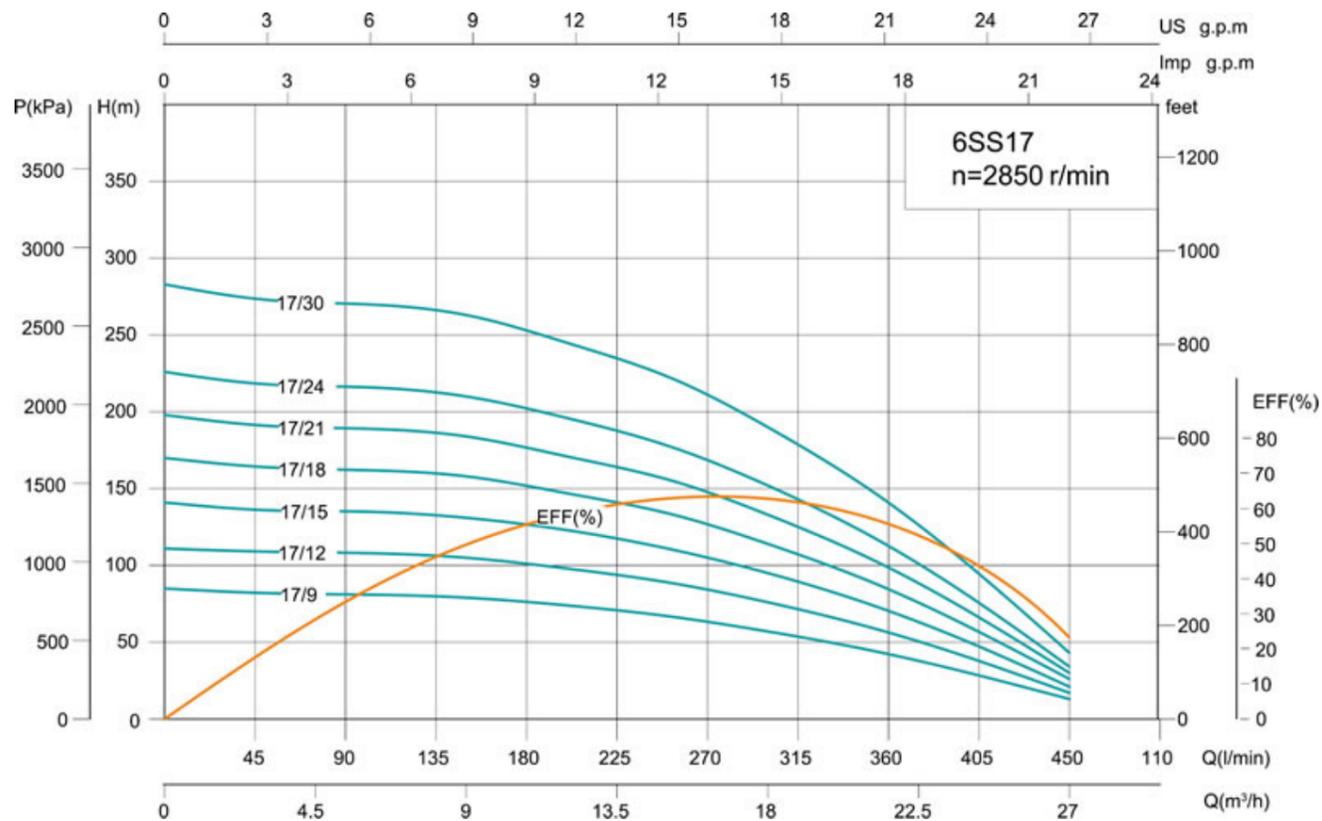

6SS

6" Deep Well Pumps

Application Limits

- Max. ambient temperature < 40°C ;
- Sand content (in mass fraction) up to 0.01%;
- Hydrogen sulfide content up to 1.5mg/L, chloride ion content up to 400mg/L;
- pH 6.5 to 8.5;
- Maximum: 70 m below the static water table.

Advantages & Features

- Available with stainless steel pump head, effective against the corrosion and abrasive wear;
- Edible oil filled motor, stable & reliable running with pressure regulating membrane;
- Available with controller box, bring about general protection;
- Installation in 6" or larger boreholes.



Performance Data

Model	Power		Flow													Head Range (m)	Packing Dim(mm) Pump (L x W x H)	G.W. (kg)	Discharge (In)
	Three-Phase	kW	HP	m³/h	0	3	6	9	12	15	18	21	24	27					
380V				l/min	0	50	100	150	200	250	300	350	400	450					
6SS17/9	5.5	7.5	H(m)	85	82	81	79	74	67	57	45	30	13	81~38	M:940x150x150 B:950x150x150	M:42.7 B:17.2	G3		
6SS17/12	7.5	10		111	109	108	105	98	89	76	60	40	17	108~50	M:1000x150x150 B:1130x150x150	M:47.8 B:21.4			
6SS17/15	9.2	12.5		141	136	135	131	123	111	95	75	50	21	135~63	M:1060x150x150 B:1310x150x150	M:53 B:25.6			
6SS17/18	11	15		170	164	162	158	147	134	114	90	60	26	162~76	M:1130x150x150 B:1490x150x150	M:61.2 B:29.9			
6SS17/21	13	17.5		198	191	189	184	171	156	133	105	70	30	189~88	M:1190x150x150 B:1670x150x150	M:67.3 B:34.1			
6SS17/24	15	20		226	218	216	210	196	178	152	120	80	34	216~101	M:1230x150x150 B:1850x150x150	M:70.4 B:38.3			
6SS17/30	18.5	25		283	273	270	263	245	223	190	150	100	43						