


**CARATTERISTICHE IDRAULICHE - HYDRAULIC PERFORMANCES**

Q= Portata - Capacity - Debit **50 Hz n= 2900 min**

Tipo Type	Power		H(m)	0	100	150	200	250	300
	kW	HP		l/min	l/sec	l/sec	l/sec	l/sec	l/sec
				m <sup>3</sup> /h	0	6	9	12	15
140 PR12 N/05	3	4	75	72	67	60	49	34	
140 PR12 N/06	4	5,5	90	87	81	72	59	40	
140 PR12 N/08	5,50	7,5	120	116	108	96	78	54	
140 PR12 N/12	7,50	10	180	174	162	144	117	80	
140 PR12 N/14	9,20	12,5	210	202	188	168	137	94	
140 PR12 N/17	11	15	255	246	229	204	166	114	
140 PR12 N/20	13	17,5	300	289	269	240	195	134	
140 PR12 N/23	15	20	345	333	310	276	224	154	
140 PR12 N/29	18,50	25	435	419	390	348	283	194	
140 PR12 N/34	22	30	510	492	458	408	332	228	

**DIMENSIONI D'INGOMBRO E PESI - OVERALL DIMENSIONS AND WEIGHTS**

Type	A mm Tri V 400	B mm	C mm Tri	M Kg Tri	P Kg
140 PR12 N/05	1079	522	557	19	13
140 PR12 N/06	1154	557	597	22	14
140 PR12 N/08	1325	627	698	27	16
140 PR12 N/12	1468	767	701	55	18
140 PR12 N/14	1588	837	751	60	21
140 PR12 N/17	1753	942	811	65	25
140 PR12 N/20	1920	1079	841	70	29
140 PR12 N/23	2115	1184	931	75	33
140 PR12 N/29	2385	1394	991	83	37
140 PR12 N/34	2640	1569	1071	92	40

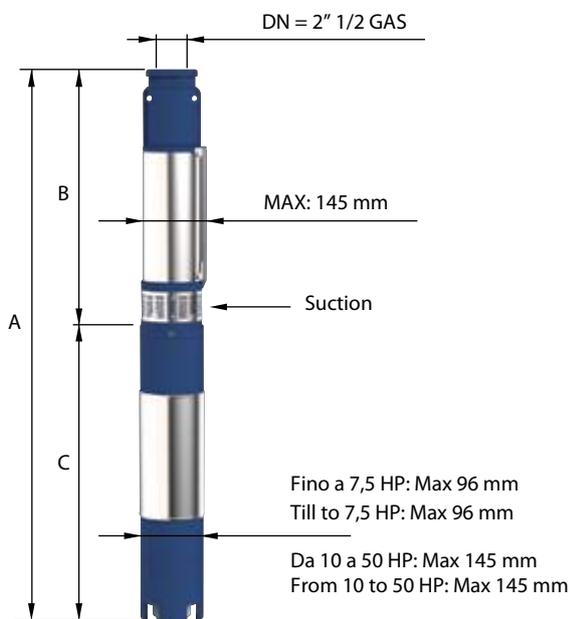

**Versioni disponibili**  
**Available versions**  
**Versions disponibles**  
**Versiones disponibles**

**140 PRX**

Gabbia di aspirazione e mandata (con piattello) in AISI 304 microfuso

*Suction cage and delivery bowl (with cap valve) in AISI 304 casted*




n% = Rendimento della pompa  
 n% = Rendement de la pompe  
 n% = Pump efficiency  
 n% = Rendimiento de la bomba

**Max 62,5 %**

kW/st = Assorbimento per stadio  
 kW/st = Absorption par étage  
 kW/st = Stage absorption  
 kW/st = Potencia absorbida por etapa

**Max 0,65**

Tolleranze secondo UNI ISO 9906 livello 3B - Tolerances according to UNI ISO 9906 grade 3B

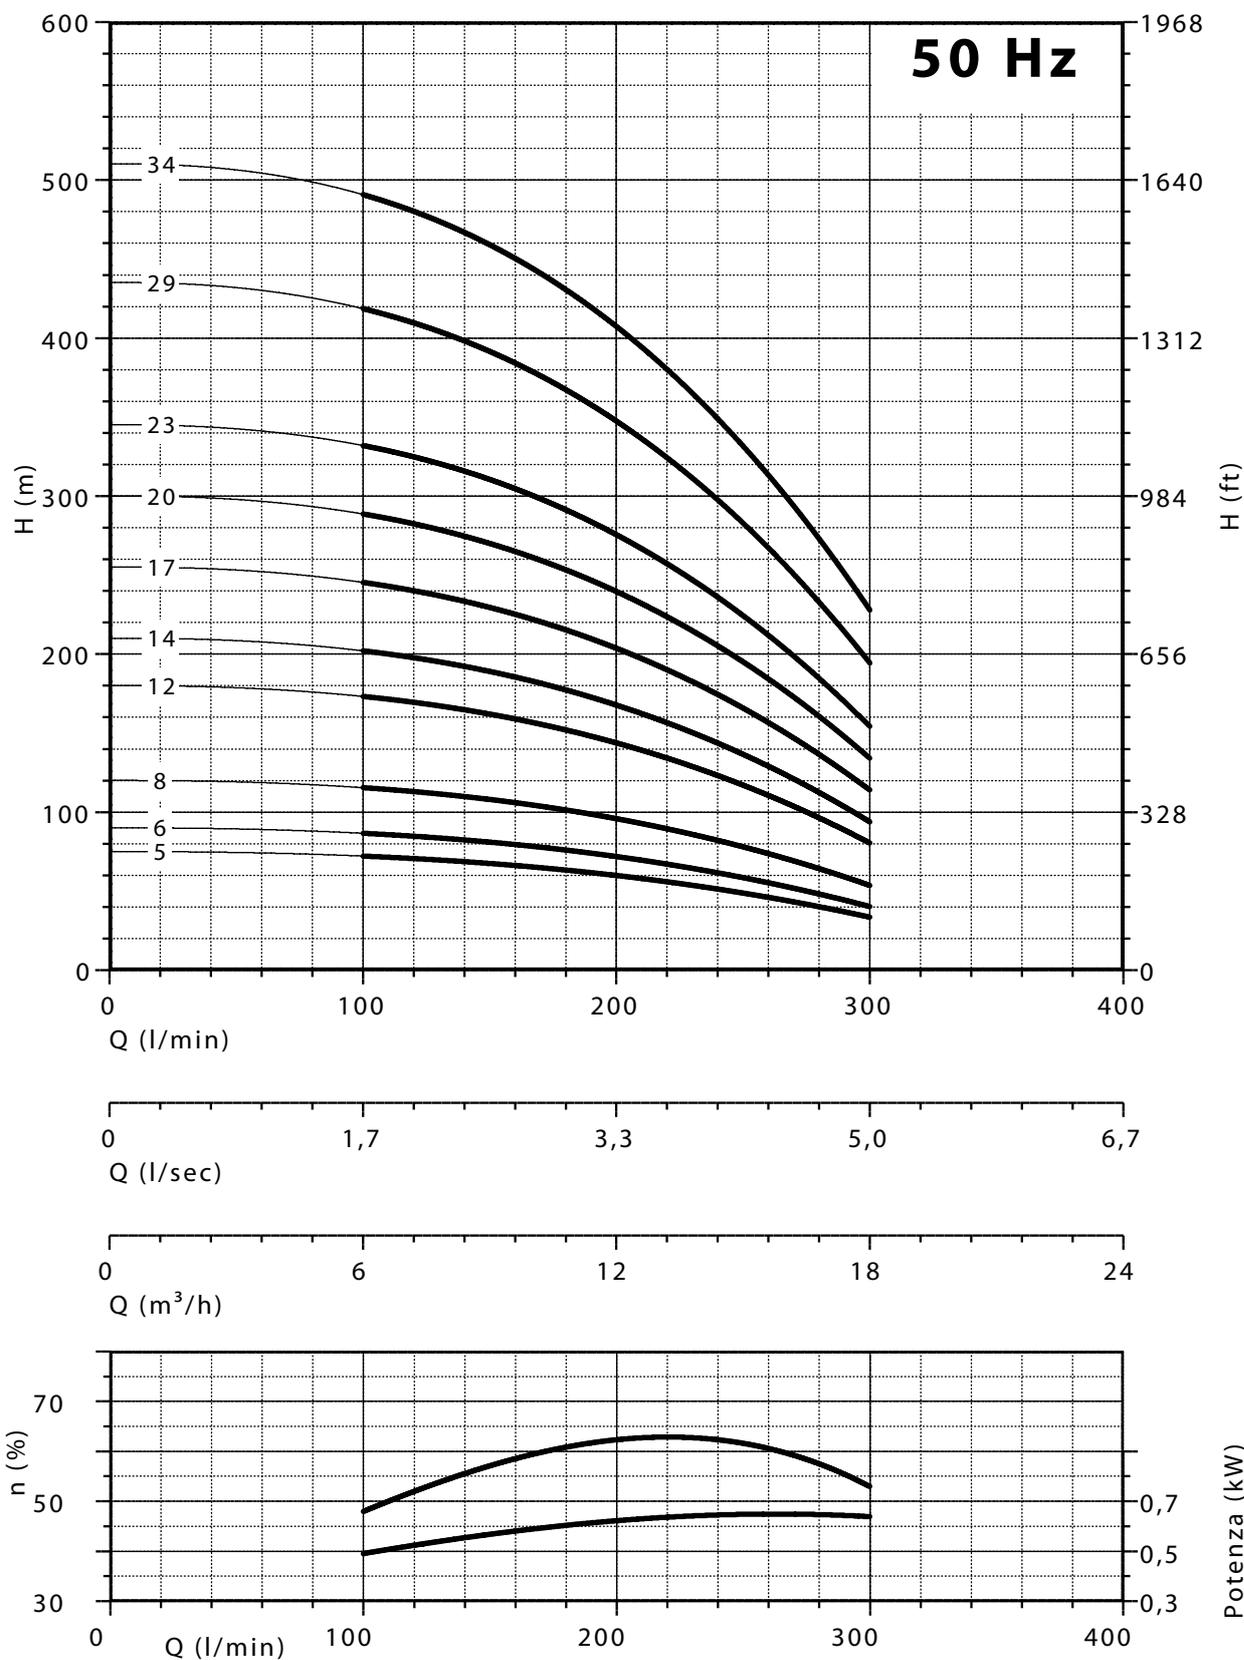

NPSH (m)	25%	50%	75%	100%
140 PR 12 - 140 PRX 12	2,2	2,2	3	4,8